

N3K-C3048TP-1GE Datasheet

[Get a Quote](#)

Overview

N3K-C3048TP-1GE is one of the Cisco Nexus 3048 switches. Cisco Nexus 3048 Switch is a line-rate Gigabit Ethernet top-of-rack (ToR) switch and is part of the Cisco Nexus 3000 Series Switches portfolio. Cisco Nexus 3048, provides compact one-rack-unit (1RU) form factor and integrated Layer 2 and 3 switching, Cisco NX-OS Software operating system, and supports both forward and reversed airflow schemes with AC and DC power inputs.

Quick Spec

Figure 1 shows the appearance.

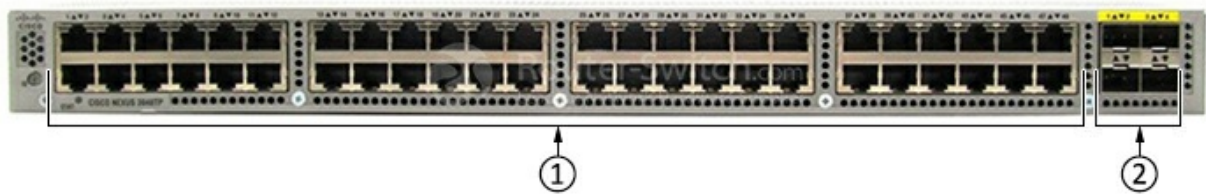


Table 1 shows the quick spec.

Part Number	N3K-C3048TP-1GE
Switching Capacity	176-Gbps
Forwarding rate	132 mpps
Line-rate traffic throughput	(both Layer 2 and 3) on all ports
Configurable maximum transmission units (MTUs)	up to 9216 bytes (jumbo frames)
Form Factor	1RU
RJ-45 ports	48 x 10/100/1000-Mbps
Uplink ports	4 x 1/10 Gbps SFP+
Redundant power supplies	2
Fan Tray	1 fan tray with redundant fans
Fixed Module	1 I/O module with management, console, and USB flash memory ports
Dimension (height x width x depth)	1.72 x 17.3 x 19.7 in. (4.4 x 43.9 x 50.5 cm)
Net Weight	20.5 lb (9.3 kg)

Product Details


Figure 2 shows the front panel of N3K-C3048TP-1GE.



Note:

(1)	48 x 10/100/1000-Mbps
(2)	4 x 1/10 Gbps SFP+

Figure 3 shows the back panel of N3K-C3048TP-1GE.

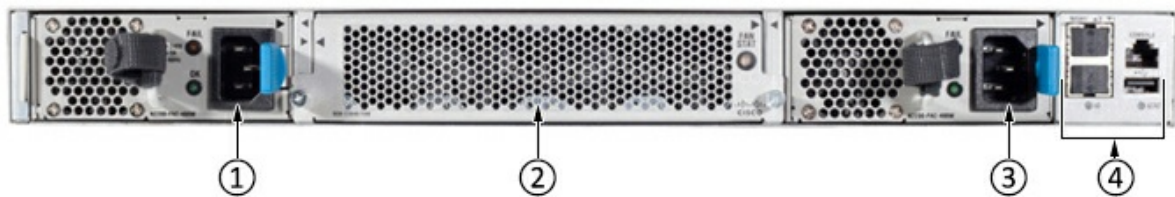

Note:

(1)	Power Connector
(2)	Fan Tray
(3)	Power Connector
(4)	1 I/O module with management, console, and USB flash memory ports

The Cables and Optics

Table 2 shows the supported cables and optics of N3K-C3048TP-1GE.

Model	Description
SFP-10G-SR	10GBASE-SR SFP+ Module
SFP-10G-LR	10GBASE-LR SFP+ Module
SFP-H10GB-CU1M	10GBASE-CU SFP+ Cable 1 Meter
SFP-H10GB-CU3M	10GBASE-CU SFP+ Cable 3 Meter
SFP-H10GB-CU5M	10GBASE-CU SFP+ Cable 5 Meter

Compare to Similar Item

Table 3 shows the comparison.

Part Number	N3K-C3048TP-1GE	N3K-C3548P-10GX
Switching Capacity	176-Gbps	960-Gbps
Forwarding rate	132 mpps	720 Mpps
Configurable maximum transmission units (MTUs)	up to 9216 bytes (jumbo frames)	Up to 9216 bytes (jumbo frames)
Form Factor	1RU	1RU
Ports	48 x 10/100/1000-Mbps	48 x fixed SFP+ ports (1 or 10 Gbps)

Get more information

Do you have any question about the N3K-C3548P-10GX?

Contact us now via [Live Chat](#) or sales@router-switch.com.

Specification

N3K-C3048TP-1GE Specification	
Physical	<ul style="list-style-type: none">· 1RU fixed form-factor switch· 48 10/100/1000-Mbps RJ-45 ports· 4 1/10 Gbps SFP+ uplink ports· 2 redundant power supplies· 1 fan tray with redundant fans· 1 I/O module with management, console, and USB flash memory ports
Performance	<ul style="list-style-type: none">· 176-Gbps switching capacity· Forwarding rate of 132 mpps· Line-rate traffic throughput (both Layer 2 and 3) on all ports· Configurable maximum transmission units (MTUs) of up to 9216 bytes (jumbo frames)
Hardware tables and scalability	
MAC addresses	128,000
Number of VLANs	4096
Spanning-tree instances	<ul style="list-style-type: none">· RSTP: 512· MSTP: 64
ACL entries	2000 ingress 1000 egress
Routing table	16,000 prefixes and 16,000 host entries 8000 multicast routes
Number of EtherChannels	52 (with vPC)
Number of ports per EtherChannel	16
Buffers	9 MB shared
Boot flash memory	2 GB
Power	
Number of power supplies	2 (redundant)
Typical operating power	120 watts (W) (48p of 1G and 4p of 10G/SR at 100% load, with 2 power supply units [PSUs])

Maximum power	124W
AC PSUs Input voltage Frequency Efficiency	100 to 240 VAC 50 to 60 Hz 89 to 91% at 220V
DC PSUs Input voltage Maximum current Efficiency	-40 to -72 VDC 33A 85 to 88%
Typical heat dissipation	409 BTU/hr (48p of 1G and 4p of 10G/SR at 100% load, with 2 PSUs)
Maximum heat dissipation	423 BTU/hr
Cooling	Forward and reversed airflow schemes Forward airflow: Port-side exhaust (air enters through fan-tray and power supplies and exits through ports) Reversed airflow: Port-side intake (air enters through ports and exits through fan tray and power supplies) Single fan tray with redundant fans Hot swappable (must swap within 1 minute)
Sound	
Measured sound power (maximum) Fan speed: 40% duty cycle Fan speed: 60% duty cycle Fan speed: 100% duty cycle	63.9 dBA 64.7 dBA 66.4 dBA
Environment	
Dimensions (height x width x depth)	1.72 x 17.3 x 19.7 in. (4.4 x 43.9 x 50.5 cm)
Weight	20.5 lb (9.3 kg)
Operating temperature	32 to 104°F (0 to 40°C)
Storage temperature	-40 to 158°F (-40 to 70°C)
Operating relative humidity	10 to 85% noncondensing Up to 5 days at maximum (85%) humidity Recommend ASHRAE data center environment
Storage relative humidity	5 to 95% noncondensing
Altitude	0 to 10,000 ft (0 to 3000m)

Download Resource

Support and Resources

 [Cisco Nexus 3048 Switch Datasheet](#)

Transition Guide

 [Guide to Upgrade Cisco Access and Backbone Switch](#)

 [Selecting Cisco Switches-Campus, Branch, Digital Building](#)

 [Select and Upgrade Cisco Data Center Switch](#)

Want to Buy

Order Now

Get a Quote

Why Router-switch.com

As a leading network hardware supplier, Router-switch.com focuses on original new ICT equipment of [Cisco](#), [Huawei](#), [HPE](#), [Dell](#), [Hikvision](#), [Juniper](#), [Fortinet](#), etc.



200+

Countries we Sold



18,000+

Customers Trusted



\$20,000,000

Inventory Available



50%-98%

Off Global List Price



100%

Safe Online Shopping

Contact Us

- Tel: +1-626-239-8066 (USA) +852-3050-1066 / +852-3174-6166
- Fax: +852-3050-1066 (Hong Kong)
- Email: sales@router-switch.com