

You are here: [Home](#) > [Products](#) > [Uninterruptible Power Supply \(UPS\)](#) > [Smart-UPS](#)

Smart-UPS

APC Smart-UPS 1500VA LCD RM 2U 230V



APC Smart-UPS, 1000 Watts / 1500 VA, Input 230V / Output 230V, Interface Port RJ-45 Serial, SmartSlot, USB, Rack Height 2 U

Includes: CD with software, Documentation CD, Installation guide, Rack Mounting support rails, Smart UPS signalling RS-232 cable, USB cable

Standard Lead Time: Usually in Stock



Be the first to [write a review](#)



[View Enlarged 360](#)

[More Images](#)

SMT1500RMI2U

[Email Technical Specifications](#)

[Printer Friendly](#)

Product Category

[Computer and Peripheral \(6\)](#)

[Home UPS \(1\)](#)

[Network and Server](#)

> [Smart-UPS](#)

> [Smart-UPS BR](#)

> [Smart-UPS On-Line](#)

> [Symmetra](#)

[Data Center and Facility 3 Phase \(15\)](#)

[Special Applications \(5\)](#)

[UPS Management \(7\)](#)

[Return to Uninterruptible Power Supply \(UPS\)](#)

[Technical Specifications](#) [Product Overview](#) [Documentation](#) [Software & Firmware](#) [Options](#) [Ratings and Reviews](#)

Output

Output Power Capacity	1000 Watts / 1500 VA
Max Configurable Power	1000 Watts / 1500 VA
Nominal Output Voltage	230V
Output Voltage Note	Configurable for 220 : 230 or 240 nominal output voltage
Output Voltage Distortion	Less than 5% at full load
Output Frequency (sync to mains)	47 - 53 Hz for 50 Hz nominal, 57 - 63 Hz for 60 Hz nominal
Other Output Voltages	220, 240
Topology	Line Interactive
Waveform Type	Sine wave
Output Connections	(4) IEC 320 C13
	(2) IEC Jumpers




Input

Nominal Input Voltage	230V
Input Frequency	50/60 Hz +/- 3 Hz (auto sensing)
Input Connections	IEC-320 C14
Input voltage range for main operations	160 - 286V
Input voltage adjustable range for mains 151 - 302V operation	
Other Input Voltages	220, 240

Batteries & Runtime

Battery Type	Maintenance-free sealed Lead-Acid battery with suspended electrolyte : leakproof
Typical recharge time	3 hour(s)
Replacement Battery	APCRBC133
RBC™ Quantity	1
Runtime Graph	

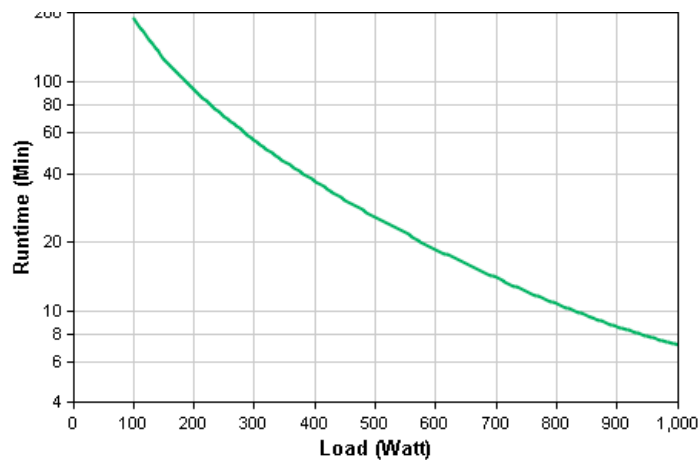

Hover over the line on the graph above to view the runtime at any desired load


Curve fit to measured runtime data. All measurements taken with new, fully charged batteries, at typical environmental conditions, with no electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)

[View Runtime Chart](#)

Energy Use/Efficiency

Load	Efficiency
25%	96.1%
50%	97.7%
75%	98.1%
100%	98.3%

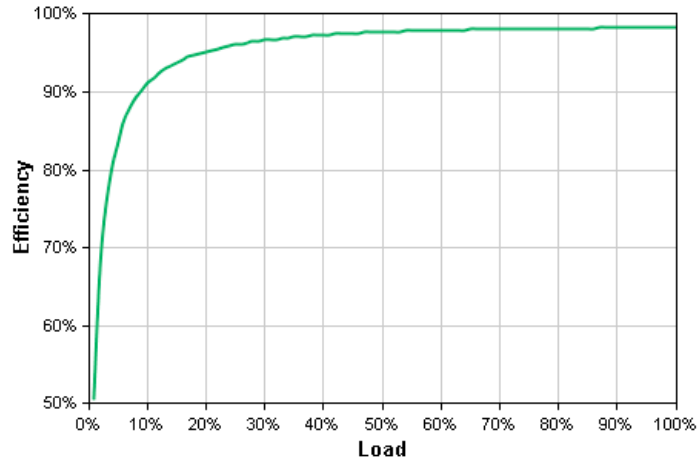

Hover over the line on the graph above to view the efficiency at any desired load

Curve fit to measured efficiency data. All measurements taken in normal operating mode, at typical environmental conditions, with nominal electrical input and balanced resistive load (PF = 1.0) output.

[View Enlarged Graph](#)

Communications & Management

Interface Port(s)	RJ-45 Serial, SmartSlot, USB
Available SmartSlot™ Interface Quantity	1
Control panel	Multi-function LCD status and control console
Audible Alarm	Alarm when on battery : distinctive low battery alarm : configurable delays
Emergency Power Off (EPO)	Optional

Surge Protection and Filtering

Surge energy rating	459 Joules
Filtering	Full time multi-pole noise filtering : 0.3% IEEE surge let-through : zero clamping response time : meets UL 1449

Physical

Physical

Maximum Height	89.00 mm
Maximum Width	432.00 mm
Maximum Depth	457.00 mm
Rack Height	2U
Net Weight	28.64 KG
Shipping Weight	31.91 KG
Shipping Height	251.00 mm
Shipping Width	594.00 mm
Shipping Depth	603.00 mm
Color	Black
Units per Pallet	8.00

Environmental

Operating Environment	0 - 40 °C
Operating Relative Humidity	0 - 95%
Operating Elevation	0-3000 meters
Storage Temperature	-15 - 45 °C
Storage Relative Humidity	0 - 95%
Storage Elevation	0-15000 meters
Audible noise at 1 meter from surface of unit	46.00 dBA
Online Thermal Dissipation	90.00 BTU/hr

Conformance

Regulatory Approvals	C-tick, CE, EN 50091-1, EN 50091-2, TUV, VDE
Standard Warranty	3 years repair or replace (excluding battery) and 2 year for battery

Sustainable Offer Status

RoHS	Compliant
REACH	REACH: Contains No SVHCs

**The time to recharge to 90% of full battery capacity following a discharge to shutdown using a load rated for 1/2 the full load rating of the UPS.